



5600 Series – Euro Profile Mortice Lockcases (Level 5-4)




Nightlatch - 5650.R & 5650.S

- Nightlatch operated by a half set of levers to retract the latchbolt from inside.
- Single cylinder on the outside operates the latchbolt with a single key turn.
- Latchbolt is automatically locked by the anti-thrust latch.



Escape Lock - 5660.R & 5660.S

- Escape lock with split follower
- Latchbolt withdrawn by lever from both sides.
- Split follower function enables deadbolt & latchbolt to be withdrawn simultaneously by inside lever handle.
- Easily reversible escape mechanism.

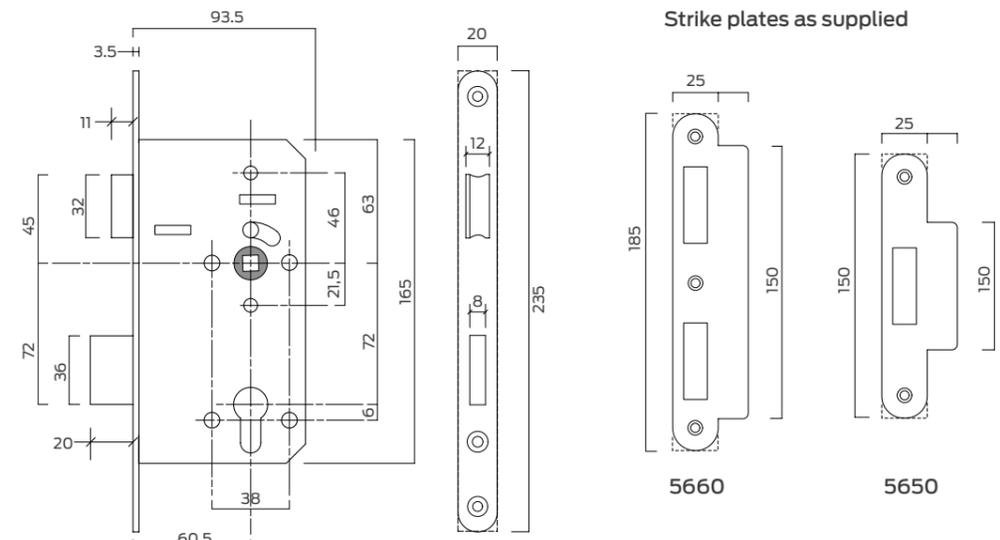

all dimensions are in mm

Product Ref:	Function/description	CE Classification
5650.R	Nightlatch function operated by a half set of levers and single cylinder. Radiused forend	3X810F1BB20
5650.S	Nightlatch function operated by a half set of levers and single cylinder. Square forend	
5660.R	Escape lock with split follower function. Radiused forend	3X810F3BA20 (EN 12209)
5660.S	Escape lock with split follower function. Square forend	376B1442AB/D (EN179)
Add suffix .R or .S to product code for Radiused or Square forend and strike plate		
5500IP	Intumescent pack suitable for all 5600 Series lockcases	

The Briton 5600 Series is a high quality, euro profile mortice lockcase offering Nightlatch and Escape Sashlock functions.

The range is dimensionally compatible with the Briton 5500 and 5400 Series.

Performance Level 5 & 4.

Features & Benefits

- A Grade 316 stainless steel single piece forend
- B Quick reversible latch without the need to dismantle the lockcase
- C Stainless steel profile latch provides a smooth, quiet operation
- D Sintered steel 8mm follower with 30° rotation
- E Follower springing suitable for unsprung lever furniture and high frequency applications.
- F Stainless steel deadbolt with 20mm throw on a single turn of the cylinder
- G Bolt through fixing holes to DIN 18251 at 38mm centres making the lock compatible with most European hardware ranges
- H Nightlatch has anti-thrust latch to prevent forced latch retraction when the door is closed.
- J Escape mechanism of 5660 escape sashlock can be easily reversed on site to suit all handing options.
- K 5660 escape lock has split follower function

Options

Radiused and square forends are available. Add suffix .R or .S to the product code.
Supplied with matching strike plate.

Finishes

Satin stainless steel.

Accessories

A full range of box strikes and full length strike plates is available. Refer to page 92 for details.

Testing & Certification

CE marked to EN 12209
Escape lock approved to EN 179 for emergency exit doors
Fire tested to EN 1634 on timber doors to achieve a 90 minute fire rating, and 4 hour for steel doors.
Please note, when installing this product to a fire resisting timber door the lock must be fitted in conjunction with the intumescent protection to ensure the integrity of the door is maintained in a fire situation.
For EN 179 compliance, the lock must be fitted with compatible lever furniture (Contact Allegion for further details).
96 hour corrosion resistance.
Full Declaration of Performance available from our website at:

www.GRRKDGDHROLHFRXN

