


4700 Series - Door Furniture

The 4700 Series furniture range offers specifiers a wide choice of styles for lever and pull handles, which are ideally matched with Briton high performance lockcases, and Briton and CISA Euro profile cylinders for optimum performance.





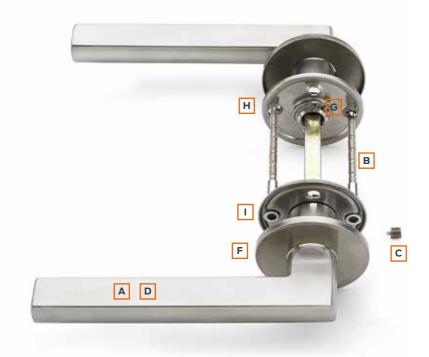

Grade 4 category of use guarantees a high performance and durability

Features & Benefits

- A Precision manufactured levers in stainless steel Grade 304
- Back to back fixing bolts and threaded bushes on lever furniture provide a strong bolt through fixing. Supplied as standard to suit doors 44 -54mm thick (alternative fixing pack available to suit 55 - 65mm)
- C Spindle is fixed to the inside and the outside lever handle by "break thru" grub screws providing greater security and durability.
- D All lever handles achieve EN 1906 Grade 4, the highest grade of use within the standard*.
- E Grub screw fixings on levers concealed from view on the underside.
- Slimline roses only 4mm thick.
- Precision engineered levers are prefixed to the rose or plate inner by hitensile circlip.
- H Unique 'ClickFit' system provides a positive snap fit for pressed rose and escutcheon covers.
- Torx head fixings supplied with all leversets and plate mounted levers provide a high quality look and minimise tampering.

Lever fixing

Lever furniture features a unique fixing method which provides a firm, positive and highly durable installation. Levers are prefixed to roses, roses are fixed with bolt through fixings and break thru spindle and grub screws which positively connect the inside and outside handles.









Testing & Certification

Tested to EN 1906 with Grade 4 Category of Use Tested to EN 1673 with Grade 3 Corrosion Resistance Fire tested to EN1634 on timber doors to achieve a 90 minute fire rating, and 4 hour for metal doors.











What's in the box?

- Pair of levers on roses
- Push on rose covers
- 8mm spindle & bolt through fixings for 35 - 54mm doors
- Hexagon wrench
- Installation instructions



4700 Series - Lever Furniture




Return to Door - 4701.20.140

Ø20mm round bar lever handle on rose with bolt through fixings at 38mm centres.

Approved for use with escape locks to EN 179.

Conforms to dimensional recommendations of BS 8300.



all dimensions are in mm




Return to Door - 4701.22.140

Ø22mm round bar lever handle on rose with bolt through fixings at 38mm centres.

Approved for use with escape locks to EN 179.

Conforms to dimensional recommendations of BS 8300.




The full hardware requirement from a single source



Straight - 4703.20.140


 \emptyset 20mm round bar lever handle on rose with bolt through fixings at 38mm centres.





Straight Mitred - 4704

 \emptyset 20mm round bar lever handle on rose with bolt through fixings at 38mm centres.








Extended Return to Door - 4701.20.175

 \emptyset 20mm round bar lever handle on rose with bolt through fixings at 38mm centres.

Approved for use with escape locks to EN 179.


Conforms to dimensional recommendations of BS 8300.





Curved Mitred - 4705.20.140


 \emptyset 20mm round bar lever handle on rose with bolt through fixings at 38mm centres.





Wing Design - 4706

Formed lever handle on rose with bolt through fixings at 38mm centres.



9




4700 Series - Lever Furniture



Hollow Cut Away - 4707


Lever handle on rose with bolt through fixings at 38mm centres.





Hollow Curve - 4708

Lever handle on rose with bolt through fixings at 38mm centres.



all dimensions are in mm



| Product Ref: | Description | Finish |
|---------------|---|--------|
| 4701.20.140 | Return to door lever on rose - Ø20mm | SS |
| 4701.22.140 | Return to door lever on rose - Ø22mm | SS |
| 4701.20.175 | Extended return to door lever on rose - Ø20mm | SS |
| 4703.20.140 | Straight lever on rose - Ø20mm | SS |
| 4704 | Straight mitred lever on rose - Ø20mm | SS |
| 4705.20.140 | Curved mitred lever on rose - Ø20mm | SS |
| 4706 | Wing design lever on rose | SS |
| 4707 | Hollow cut away lever on rose | SS |
| 4708 | Hollow curved lever on rose | SS |
| 4701.55-65.FS | Alternative fixing pack for doors 55 - 65mm | n/a |
| | | |

Accessories to suit all mortice lock applications









| Product Ref: | 4702BP.B.22.140 |
|--------------|---------------------|
| Description: | Plate mounted Ø2 |
| | lever handle |
| | Blank plate for use |
| | |


22mm latches


4702BP.EC.22.140 Plate mounted Ø22mm

lever handle euro profile cylinders for use with sashlocks

Plate mounted lever handle Ø22 Backplate with bathroom function turn with outside Backplate with cutout for indicator and emergency release. Handed assembly - see below.

| Dimensions: | 170 x 170 x 2mm | 170 x 170 x 2mm | 170 x 170 x 2mm |
|-------------|--|-----------------|--|
| Fixings: | Supplied as a pair with bolt through fixings and 8mm | | Supplied as a pair with bolt through fixings and 8mm |
| | spindle suitable for doors 44 - 54mm * | | spindle suitable for doors 44 - 54mm* |
| Finish: | All items are available in Satin Stainless Steel | | |







4702BP.WC.22.140.SS.L





12







| Product Ref: | 4713.4 | 4714.4 | 4715.4 |
|--------------|--|----------------------|------------------|
| Function: | Euro profile cylinder escutcheon | Lever key escutcheon | Blank escutcheon |
| Description: | Ø52 x 4mm with snap on cover. Supplied as pairs as standard. | | |
| | Bolt through fixings supplied as standard suitable for doors 44mm-54mm. Alternative fixings available. | | |
| Finish: | All items are available in Satin Stainless Steel | | |












| Product Ref: | 4710 | 4711 | |
|--------------|---|------------------------------------|--|
| Function: | Bathroom turn & indicator | Bathroom extended turn & indicator | |
| Description: | Ø52 x 4mm with 8mm spindle and bolt through fixings for doors 38 - 44mm | | |
| | For doors 44 - 54mm thick please specify 4710.XSP (for 4710) or 4711.XSP (for 4711) | | |
| Einich: | All itams are available in Satin Stainless Steel | | |



4700 Series - Pull Handles








| Diameter: mm | 20 | 22 | 20 | 22 | 20 | 22 | 20 | 22 |
|--------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Product Ref: | 4722.20.200 | 4722.22.200 | 4722.20.300 | 4722.22.300 | 4722.20.400 | 4722.22.400 | 4722.20.600 | 4722.22.600 |
| Description: | Mitre | d han | dle - R | ound b | oar sec | tion | | |

Pull handles available as single or back to back

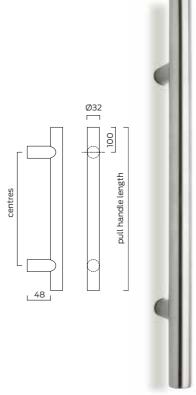

| Pillar pull handle - Round bar section | |
|--|-------------|
| 4724.32.400 | 4724.32.600 |
| 32mm | 32mm |
| 200 | 400 |
| | 32mm |




All Briton 4700 Series pull handles can be ordered individually and must be ordered together with a standard fixing pack which contains all the components required to mount the pull handle in any of the 4 applications shown opposite.


For back to back assembly simply order two individual pull handles plus two standard fixing packs.

| A STATE | | |
|---------|--------------|---|
| 101 | Product Ref: | Description |
| y Jan | 4726 | Standard fixing pack for timber, metal or glass doors (order 2 packs for back to back assemblies) |
| | | |


Pull handle fixing options (included in Standard fixing pack)




Bolt through - single pull handle



Back to back pair on timber door



Secret fix - single pull handle



Back to back pair on glass door

13



4700 Series - Pull Handles & Push Plates

Rose mount fixings

Briton 4721 and 4722 pull handles can be ordered with an optional face fixed rose. Roses are supplied with stainless steel face fixing screws. Snap fit push on covers conceal all fixings.



Push plates

A range of push plates with radiused corners designed for use on the reverse of a pull handle with bolt through fixing. Each plate should be chosen to cover the pull handle fixing bolts.



4700 Series - Accessories


Symbols & signage

A range of 76mm dia. x 1.5mm face fixed stainless steel signs and symbols are available. Supplied with stainless steel woodscrew fixings.



Cylinder pull

Formed stainless steel cylinder pull for euro profile cylinder supplied with stainless steel face fixing screws. Ideally suited to use with mortice nightlatches.




| Product Ref: | Description |
|--------------|--|
| 4733 | Cylinder pull with aperture for euro profile cylinder. |

Rose mount fixings

One fixing pack is required for each pull handle and they must be ordered according to the pull handle diameter (20 or 22mm).

| Product Ref: | Description |
|--------------|--|
| 4725.20 | Face fixed rose mounting kit for 20mm diameter pull handles. |
| 4725.22 | Face fixed rose mounting kit for 22mm diameter pull handles. |
| | |



| Product Ref: | Description | |
|--------------|--------------|-----------------|
| 4730.75.375 | 75mm x 375mm | Plain |
| 4730.75.475 | 75mm x 475mm | Plain |
| 4730.75.675 | 75mm x 675mm | Plain |
| 4731.75.375 | 75mm x 375mm | Engraved 'PUSH' |
| 4731.75.475 | 75mm x 475mm | Engraved 'PUSH' |
| 4731.75.675 | 75mm x 675mm | Engraved 'PUSH' |
| 4732.75.375 | 75mm x 375mm | Engraved 'PULL' |
| 4732.75.475 | 75mm x 475mm | Engraved 'PULL' |
| 4732.75.675 | 75mm x 675mm | Engraved 'PULL' |

| Product Ref: | Description |
|--------------|--------------------------------|
| 4750.01 | Unisex symbol |
| 4750.02 | Male symbol |
| 4750.03 | Female symbol |
| 4750.04 | Disabled symbol |
| 4750.05 | WC sign |
| 4750.06 | Shower symbol |
| 4750.07 | Baby Change symbol |
| 4750.08 | Push |
| 4750.09 | Pull |
| 4750.10 | Fire door keep shut |
| 4750.11 | Fire door keep locked |
| 4750.12 | Automatic fire door keep clear |
| | |






4700 Series - Accessories

Door stops



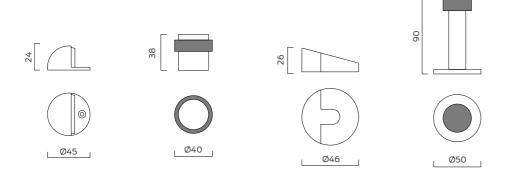

4700 Series - Accessories

Hooks

A series of face fixed single and double hooks. Supplied with stainless steel face fixings.



Ø48



| | | | | 4 | Single hook - small, face fixed |
|----|-------|---------|-----|-----|---------------------------------|
| | | | 474 | 5.1 | Single hook - large, face fixed |
| | 0 0 0 | 0 0 848 | 474 | 5.2 | Double hook - large, face fixed |
| 46 | | | | | |
| | l b | | | | |

Kick plates

Kick plates are available in Grade 304 stainless steel in heights and widths to order. Plates have square corners as standard but are also available with radiused corners (5mmR or 10mmR).

Supplied with face fixings as standard (self adhesive option also available).

Other options and materials are available - please ask for details.

Plates are priced per square metre.



| Ref: | Description |
|----------|---|
| 4760.304 | Kick plate 1.2mm thick. Satin stainless steel Grade 304. Square corners with face fixing screws. |
| 4761.304 | Kick plate 1.5mm thick. Satin stainless steel Grade 304. Square corners with face fixing screws. |

all dimensions are in mm